



79211

79204

79277

Tape is wound on a low-sloughing plastic core.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at Desco.com.

No sulfur, surfactants or silicone based material (adhesive, film backing, release material) is used in the manufacture of our cellulose tape.

Wescorp Tape Storage and Limited Warranty:

The user must determine the suitability for use of an antistatic tape for his particular application. For best results, tape inventory should be continually replenished. It is recommended that rolls of tape be stored flat and rotated (flipped over to the other side) periodically. Tapes should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Tape should not be stored in ultraviolet sunlight, moisture, or heat. Tape over one year old should be evaluated by the user to determine acceptability for the user's application. Desco Industries, Inc. recommends those tracking useful life of product to use shipping/invoice date as Desco Industries, Inc. expressly warrants that for a period of one (1) year from the date of purchase, our Wescorp Brand Antistatic Tape will be free of defects in material (parts) and workmanship (labor). See details of Limited Warranty online at <http://www.desco.com/Warranty.aspx>

*Wescorp is a Desco Industries brand.

Antistatic Cellulose Tape

For general purpose applications



- 2.4 mil (0.06 mm) total thickness
- Cellulose film resistance 10E10 - 10E11 ohms
- Rubber based adhesive absorbs moisture
- Adhesive surface resistance 10E10 - 10E11 ohms
- Temperature Range -10°C - 71°C (14°F - 160°F); meets MIL-B-81705 of 100°C for 10 min max
- Available in clear, clear with ESD symbols, and clear with ESD symbols with yellow stripe. Marking is approved symbols of Mil STD-1285* and ESD Association.
- Symbols printed in between film and adhesive; will not rub off.

Tape	Width				Core	Length
	0.5"	.75"	1"	2"		
Antistatic Clear Cellulose	79200	79201	79202		1"	36 yds
	79203	79204	79205	79206	3"	72 yds
Antistatic Clear Cellulose with Symbols	79209	79210	79211	79212	3"	72 yds
Antistatic Clear Cellulose w/Symbols w/Yellow Stripe	79275	79276	79277	79278	3"	72 yds

Tape widths are nominal metric ±0.8 mm (±1/32")

- 1/4" is 6 mm nominal or 0.236"
- 1/2" is 12 mm nominal or 0.472"
- 3/4" is 18 mm nominal or 0.709"
- 1" is 24 mm nominal or 0.945"
- 2" is 48 mm nominal or 1.890"

Width tolerance ±1/32"

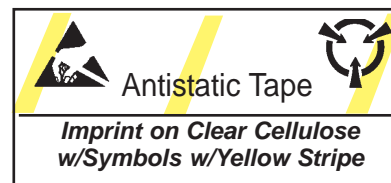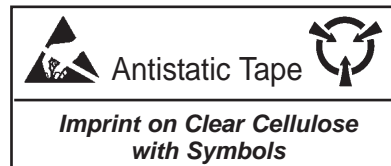

*Military organizations sometimes use MIL-STD-1285 for hardware marking and that document once required the use of the "three arrows in a circle" symbol. That symbol has been changed for consistency with industry marking to the "hand in triangle" ESD Susceptibility symbol. (Ref: TR20.20 section 5.3.14.1)



WESCORP* ANTISTATIC CELLULOSE TAPE, PLASTIC CORE

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com
 PHONE (909) 627-8178 FAX (909) 627-7449
 DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
 PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
79200

DATE:
December
2008

